

GEARBOX

	Standard	Close ratio
Ratios—Top	4.138	4.48
—Third	5.70	6.19
—Second	8.91	8.91
—First	16.59	16.59
—Reverse	13.824	13.824

WHEELS AND TYRES

4½J wheels fitted with Dunlop SP.41 (155 x 12) tubeless tyres.

Pressures—Road

—Front	18 lbs.in. ² (1.26 kg.cm. ²)
—Rear and spare...	30 lbs.in. ² (2.11 kg.cm. ²)

Pressures—Competition

—Front	20 lbs.in. ² (1.41 kg.cm. ²)
—Rear and spare...	32 lbs.in. ² (2.25 kg.cm. ²)

CAPACITIES


Fuel capacity—Standard tank	6 galls. (7.2 U.S. galls; 27 litres)
—Optional tank	10½ galls. (12.6 U.S. galls.; 47.7 litres)
Oil capacity—Engine (with filter and oil cooler) ...	6½ pts. (8 U.S. pints; 3.9 litres)
Radiator (with heater) ...	11 pts. (13.2 U.S. pints; 6.2 litres)

BRAKES

Servo unit—Make	Girling
Linings—Front and rear	Ferodo VG.95

SUSPENSION

Camber angle—Front	+2½° to +3½°
(on gap gauges)—Rear	—1½° to —2°

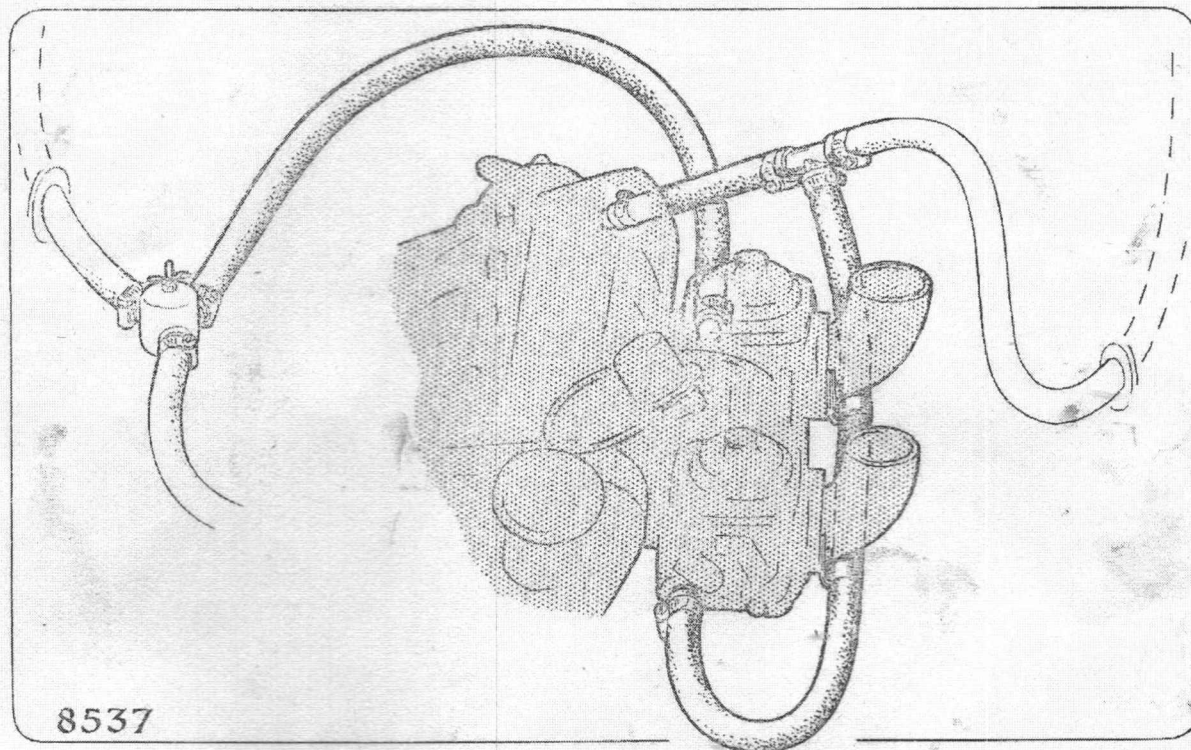

8537

Fig. 1 Layout of pipes for water heated inlet manifold