
WIRING DIAGRAM

STILETTO

From Chassis Number B.302000001

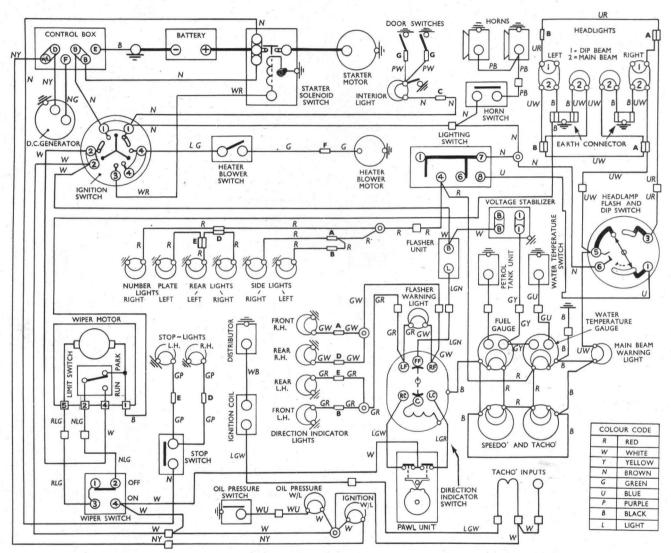

CABLES 'UR' AND 'UW' TO TERMINALS 3 AND 5 RESPECTIVELY ON HEADLAMP FLASH-AND-DIP SWITCH ARE REVERSE CONNECTED FOR LEFT-HAND-DRIVE CARS.

SNAP CONNECTOR LOCATIONS

- A —On right-hand front wing valance beneath glass-fibre moulding.
- B —On left-hand front wing valance beneath glass-fibre moulding.
- C -Behind facia at extreme right-hand side.
- D -In engine compartment at right-hand side.
- E —In engine compartment at left-hand side.
- F —In luggage compartment at front near blower.
- G -At door pillar switch.

	ABBREVIATIONS
W/L	WARNING LIGHT
R.H.	RIGHT HAND
L.H.	LEFT HAND
R.H.D.	RIGHT HAND DRIVE
L.H.D.	LEFT HAND DRIVE

	SYMBOLS
4	SNAP CONNECTOR
φ	PLUG AND SOCKET CONNECTOR
-	CRIMPED CONNECTION
0	EARTH THROUGH UNIT
+	EARTH THROUGH CABLE

9669 W